IB/2005/050293

PA 1161843

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

April 26, 2004

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.
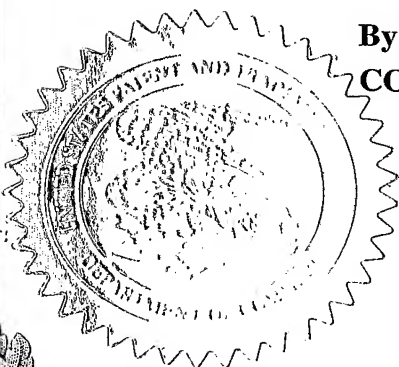
APPLICATION NUMBER: *60/539,724*
FILING DATE: *January 28, 2004*

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

By Authority of the
COMMISSIONER OF PATENTS AND TRADEMARKS

M. K. HAWKINS
Certifying Officer

PATENT APPLICATION SERIAL NO. _____

U.S. DEPARTMENT OF COMMERCE
PATENT AND TRADEMARK OFFICE
FEE RECORD SHEET

02/02/2004 FMETEKI1 00000117 141270   60539724

01 FC:1005   160.00 DA

PTO-1556
(5/87)

PTO/SB/16 (02-01)
Approved for use through 10/31/2002. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

PROVISIONAL APPLICATION FOR PATENT COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53 (c).

Express Mail Label No. EV 312 068 374	Date of Deposit: JANUARY 28, 2004

INVENTOR(S)

Given Name (first and middle [if any])	Family Name or Surname	Residence (City and either State or Foreign Country)
Rani Mary	**JOSEPH**	**EINDHOVEN, THE NETHERLANDS**
Piotr Leszek	**SAWICKI**	**EINDHOVEN, THE NETHERLANDS**

☐ Additional inventors are being named on the _____ separately numbered sheets attached hereto

TITLE OF THE INVENTION (280 characters max)

Automatic Audio Signal Dynamic Range Adjustment

CORRESPONDENCE ADDRESS

Direct all correspondence to:

☒ Customer Number   24737   ➔   ***24737***

OR   Type Customer Number here

☐ Firm or Individual Name	PHILIPS ELECTRONICS NORTH AMERICA CORPORATION				
Address	345 SCARBOROUGH ROAD				
City	BRIARCLIFF MANOR	State	NY	ZIP	10510
Country	USA	Telephone	(914) 333-9643	Fax	(914) 332-0615

ENCLOSED APPLICATION PARTS (check all that apply)

☒ Specification Number of Pages **12**   ☐ CD(s), Number _____

☒ Drawing(s) Number of Sheets **1**   ☐ Other (specify) _____

☐ Application Data Sheet. See 37 CFR 1.76

METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT (check one)

☐ Applicant claims small entity status. See 37 CFR 1.27.

☐ A check or money order is enclosed to cover the filing fees

☒ The Commissioner is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number: **14-1270**

☐ Payment by credit card. Form PTO-2038 is attached.

FILING FEE AMOUNT ($) **160.00**

The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.

☒ No.
☐ Yes, the name of the U.S. Government agency and the Government contract number are: _____.

Respectfully submitted,
SIGNATURE _Michael E Belk_

TYPED or PRINTED NAME   **MICHAEL E. BELK**

TELEPHONE   **(914) 333-9643**

Date   **JANUARY 28, 2004**

REGISTRATION NO.: **33,357**
(if appropriate)

Docket Number: **US040073**

USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

AUTOMATIC AUDIO SIGNAL DYNAMIC RANGE ADJUSTMENT

The invention herein is related to the field of
automated processing of audio signal and more specifically to

5 the field of dynamic range compression/expansion of audio
signals.

Dynamic range is the ratio of a specified maximum level
of a parameter, such as power, current, voltage, or frequency
to the minimum detectable level of that parameter. In the

10 field of audio signal processing the term dynamic range
usually refers to the dynamic range of the power level
usually referred to as signal level. The signal level is
usually measured in decibels (dB) and dynamic range is
usually expressed as the difference in dBs between the

15 maximum signal level and the minimum signal level. In this
application dynamic range will refer to the difference in
signal level expressed in dbs.

The dynamic range of human hearing, the difference
between the softest sound we can perceive and the loudest we

20 can comfortably hear, is about 120 dB. The dynamic range
typically provided by vinyl records is around 55 dB. The
dynamic range available for CD's is around 90 dB and the
dynamic range for DVD is about 120 dB.

Compressors, expanders, and noise gates are audio signal

25 processing devices used to alter the dynamic range. This is
often done to achieve a more consistent sound when recording,
or to provide a special effect to make music sound louder
without increasing the maximum volume level. Compressors work
by providing higher signal gain to lower level signals in

30 order to reduce dynamic range. Compression increases the
loudness of quieter portions of a performance and/or quiets
the louder portions. Expanders are the opposite of
compressors. Expanders make quiet portions of audio quieter

1

and/or loud portions louder in order to increase the dynamic range. Noise gates reduce dynamic range by truncating or cutting off lower level signals.

Analog broadcasters usually compress the dynamic range

5 of audio because of legal limits on the maximum volume of the broadcast and the high level of noise in analog broadcasting. Receivers for analog broadcasts, commonly use a noise gate to truncate the lower portions of the dynamic range of the signal in order to reduce noise. Some analog receivers have

10 also included expanders to expand the dynamic range of the received signal.

In digital broadcasting, compression and noise gates are not required since there are no volume limitations and transmission noise does not result in noise in the decoded

15 audio signal. However, digital broadcasters continue to compress audio in order to maintain the same sound as analog broadcast and because many listeners are in noisy environments or are listening at a relatively low volume.

It has long been recognized that users generally want

20 more control over various aspects of sound quality. Even some of the earliest audio equipment provided user control over volume. When stereo sound was first developed users were immediately given separate control over the volume of the left and right channels. Later audio equipment provided user

25 control over treble and base settings and surround sound usually provides control over volume of front and back speakers.

Those skilled in the art are directed to the following citations which are hereby incorporated in whole by

30 reference. Published US patent application US2003/0002659 A1 by Adoram Erell, published Jan 2, 2003 discloses a telephone in which the dynamic range of the sound provided by the loudspeaker of a telephone is adjusted depending on the noise

2

in the audio signal received from the microphone of the telephone. US published application US2001/0055400 A1 discloses dynamic range compression depending on volume setting of audio equipment in an automobile.

5   While it is known that optimal dynamic range of sound provided by a loudspeaker may depend on ambient noise or signal levels, the inventors have discovered that it is useful to control the dynamic range for a loudspeaker depending on other conditions that are at least partially

10   independent of ambient noise level or volume settings.

    The inventors have also discovered that automatic control of dynamic range is required because the audience of a audio performance is generally not aware of the need to adjust the dynamic range. That is, while users of audio

15   equipment prefer one dynamic range setting over another dynamic range setting, it is not obvious to the user that the dynamic range needs to be adjusted or whether it should be increased or decreased. In the invention herein the dynamic range of an audio signal is automatically adjusted, for

20   example, depending on ambient or external conditions.

    In one aspect of the invention, a sound source receives an input audio signal and a sense signal depending on an ambient condition independent of sound. The sound source has dynamic range controller that automatically adjusts the

25   dynamic range of the input audio signal to provide the output audio signal, the adjusting depending on the sense signal. Then the sound source converts the output audio signal to ambient sound waves.

    The input signal may be a tuner for providing a baseband

30   audio signal from a modulated broadcast signal from cable, satellite or antenna; a reader for providing the audio signal from a record carrier; or a local area network connection. The automatic dynamic range controller may provide continuous

3

adjustment, for example, proportional to the sense signal. Alternatively, the automatic dynamic range controller my provide discrete adjustments depending on predetermined levels of the sense signals, for example, an on/off
5   adjustment depending on a threshold level.

The ambient condition independent of sound, may be for example, the time of day, the ambient light level, the location of the sound source, the acoustic properties at the location of the sound source, and when the sound waves
10   represent music, the genre of the music.

In another aspect of the invention, a sound source receives an input audio signal and at least two sense signals. One sense signal depends on the ambient sound noise level, and the other sense signal depends on a different
15   condition such as a sound volume setting of the sound source. The sound source has dynamic range controller that automatically adjusts the dynamic range of the input audio signal to provide the output audio signal, the adjusting depending on both of the sense signals. Then the sound source
20   converts the output audio signal to ambient sound waves.

Additional aspects and advantages of the invention will become readily apparent to those skilled in the art from the detailed description below with reference to the following drawings.
25   Figure 1 illustrates a specific example embodiment of the sound source invention herein.

Figure 2 illustrates a specific example embodiment of the method of the invention herein for adjusting the dynamic range of provided sound waves.
30   In figure 1, a portable sound source 100 includes a dynamic range controller 102. Such portable sound sources include AM/FM radios, CD and DVD players, television sets, vehicle audio systems, and MP3 players. The dynamic range

4

controller receives an audio input signal at input terminal
104 and receives sense signals at one or more sense terminals
106-108, and adjusts the dynamic range of the audio input
signal depending on the sense signals to provide an audio
5   output signal at output terminal 110. The audio output signal
is directed to a loudspeaker 112 to convert the audio output
signal to sound waves. The dynamic range controller may be a
combination of one or more of a dynamic range compressor, a
dynamic range expander, or a noise gate. Loudspeaker 112 may
10 be any device for converting the output audio signal to sound
waves. The loudspeaker may be mono, stereo, or surround
sound, and may include multiple speaker types such as
tweeters, horns, woofers or solid state sound devices. Input
terminal 104 is connected through a switch 120 to an audio
15 signal input. A well known example of an audio signal input
includes antenna 122 and demodulator/tuner 124. The antenna
may be a radio antenna for receiving terrestrial broadcasts
or a satellite antenna. Well known examples of such inputs
include cellular telephone systems, AM/FM radio, television
20 broadcasts, or a wireless network. Alternatively, the input
may be a memory device reader 206 such as a CD, DVD, hard
disc drive, or a solid state memory cartridge interface.
Also, the input may be a connection 208 to a wired network
such as a connection to a CATV system, telephone system, or
25 computer network.

Sensor inputs 106-108 receive sensor signals from
sensors 210-216. The ellipses in the figure indicate that
additional sensors may be provided. Herein, sensor has a
very broad meaning. The sensors may be anything that detects
30 or determines a condition such as ambient, external or
internal conditions. For example, a sensor might be a clock
212 to provide the time-of-day, or multiple microphones 214
and 216 to detect ambient sound levels or a processor 210 to

5

determine the dynamic range of the input audio signal. Additional detectors may include ambient light sensors, location sensors such as GPS, a network detection sensor (for example, to determine when the sound source in inside an

5 automobile), or a sensor that determines the acoustic properties of the location of the sound source. In the case of processor 210, the processor may detect the power level of the input audio signal or it may detect information in the audio signal such as the genre of music in the signal. The

10 sensors may be communication devices which, for example, receive a code from a radio or infra-red remote control signal to identify the audience and the sensor may provide a sense signal indicating the preferences of the audience with regard to dynamic range.

15 In figure 2 an example 200 of the method of the invention is illustrated. In step 202 an input audio signal is received. In step 204 a sense signal is received. The sense signal may be dependent on any ambient or external condition that is independent of ambient noise or sound

20 volume. In step 206 the dynamic range of the input audio signal is adjusted to provide an output audio signal, the adjusting depending on the sense signal. In step 208, the output audio signal is converted to sound waves, for example, by a loudspeaker.

25 The above description merely illustrates the present invention and should not be construed as limiting the appended claims to any particular embodiment or group of embodiments. Thus, while the present invention has been described in particular detail with reference to specific

30 example embodiments, it should be appreciated that numerous modifications and changes may be made thereto without departing from the broader and intended spirit and scope of the invention as set forth in the following claims. The

6

specification and drawings are accordingly to be regarded as merely illustrative and not to limit the scope of the appended claims.

In interpreting the appended claims, it should be understood

5 that:

    a)   the word "comprising" does not exclude the presence of additional elements or acts than those listed in a given claim;

    b)   the word "a" or "an" preceding an element does not

10 exclude the presence of a plurality of such elements;

    c)   any reference signs in the claims do not limit their scope;

    d)   several "means" may be represented by the same item or hardware or software implemented structure or function;

15 and

    e)   each of the disclosed elements may be comprised of hardware portions (e.g., discrete electronic circuitry), software portions (e.g., computer programming), or any combination thereof.

7

CLAIMS:

1. A sound source, comprising:

    an input (104) for receiving an input audio signal;

    an input (106) for receiving a sense signal depending on
an ambient condition independent of sound; and

    a dynamic range control (102) that automatically adjusts
the dynamic range of the input audio signal to provide an
output audio signal, the adjusting depending on the sense
signal; and

    a loudspeaker (112) that converts an output audio signal
to ambient sound waves.

2. The sound source of claim 1, wherein:

    the input is selected from one or more of: a
demodulator/tuner (124) for providing a baseband audio signal
from a modulated broadcast signal from cable, satellite or
antenna; a reader (206) for providing the audio signal from a
record carrier; and a network connection (208).

3. The sound source of claim 1, wherein the dynamic range
adjustment is switched between discrete predetermined levels
of dynamic range adjustment depending on the sense signal.

4. The sound source of claim 3, wherein depending on the
sense signal, in some cases the dynamic range of the output
signal is identical to the dynamic range of the input signal
and in other cases the dynamic range of the output signal is
substantially less than the dynamic range of the input
signal.

5. The sound source of claim 1, wherein the automatic
dynamic range control provides substantially continuous

8

variation in the level of adjustment of the dynamic range of the output audio signal depending on substantially continuous variations in the sense signal.

6. The sound source of claim 1 wherein the sound independent ambient condition is a time of day.

7. The sound source of claim 1 wherein the sound independent ambient condition is the ambient light level.

8. The sound source of claim 1 wherein the input audio signal is music and the sound independent ambient condition is the genre of the music.

9. The sound source of claim 1 wherein the sound independent ambient condition is the location of the sound source.

10. The sound source of claim 1 wherein the sound independent ambient condition is the acoustic properties at the location of the sound source.

11. The sound source of claim 1 wherein multiple sensors provide one or more sense signals depending on multiple ambient conditions and the dynamic range control adjusts the dynamic range depending on the one or more sense signals.

12. A method, comprising:
   receiving an input audio signal;
   receiving a sense signal depending on an ambient condition independent of sound;

9

automatically adjusting the dynamic range of the input audio signal to provide an output audio signal, the adjusting depending on the sense signal; and

converting the output audio signal to ambient sound waves.

13. An sound source, comprising:

an input for receiving an input audio signal;

an input for receiving a first sense signal depending on a condition, the condition being an ambient sound noise level;

an input for receiving a second sense signal depending on another different condition;

a dynamic range control that automatically adjusts the dynamic range of the input audio signal to provide an output audio signal, the adjusting depending on the first and the second sense signals; and

a loudspeaker for converting the output audio signal to ambient sound waves.

14. The sound source of claim 13, wherein the other condition is related to sound.

15. The sound source of claim 13, wherein the other different condition is a volume setting of the sound source.

16. The sound source of claim 13, wherein the other different condition is the dynamic range of the input audio signal.

17. A sound source, comprising:

an input for receiving an input audio signal;

10

an input for receiving a sense signal depending on an external condition independent of sound; and

an dynamic range control that automatically adjusts the dynamic range of the input audio signal to provide an output audio signal, the adjusting depending on the sense signal; and

a loudspeaker that converts an output audio signal to ambient sound waves.

18. The sound source of claim 17, wherein the sound independent external condition is the identity of the audience.

19. The sound source of claim 17 wherein the sound independent external condition is distance between a loudspeaker and an audience.

20. The sound source of claim 17 wherein the sound independent external condition is the location of the sound source.

21. The sound source of claim 17 wherein the sound independent external condition is the source of the input audio signal.

11

ABSTRACT

A sound source receives an input audio signal and a sense signal depending on an external condition. The sound source has dynamic range controller that automatically adjusts the dynamic range of the input audio signal to provide the output audio signal, the adjusting depending on the sense signal. Then the sound source converts the output audio signal to ambient sound waves.
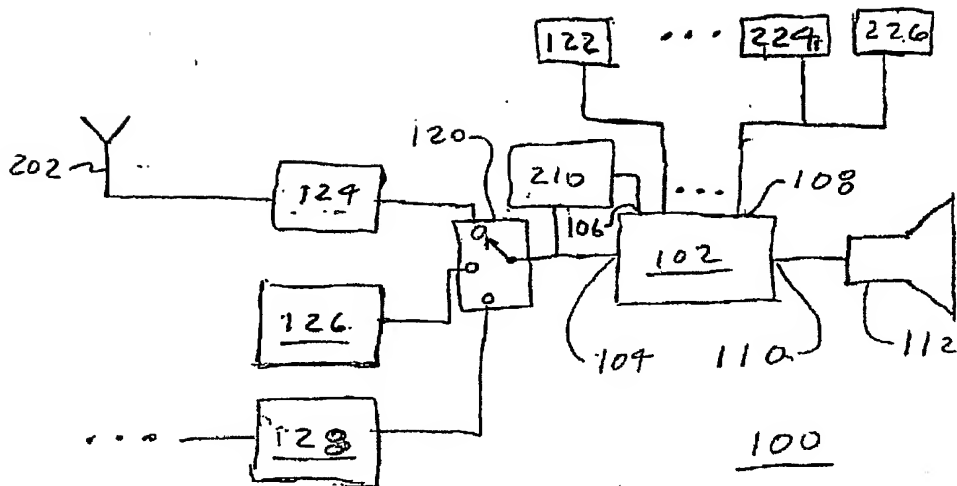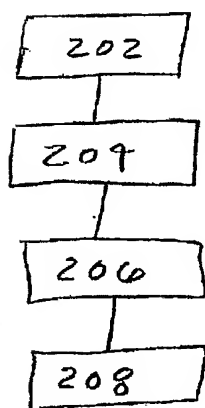
12

Fig. 1

100

200

Fig. 2